
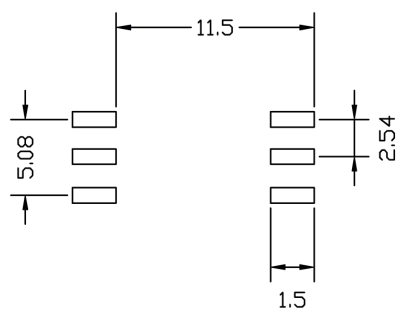
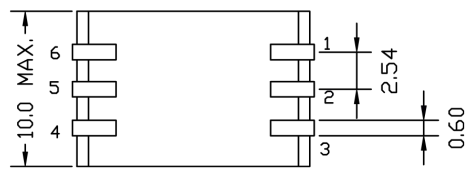
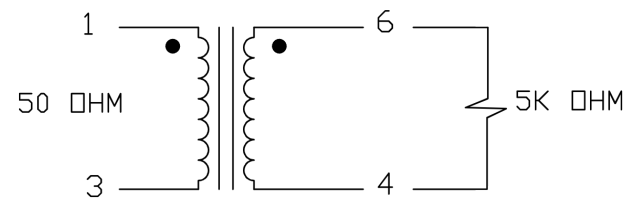


REACH & RoHS  
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	MQ.Cui	2023.03.02

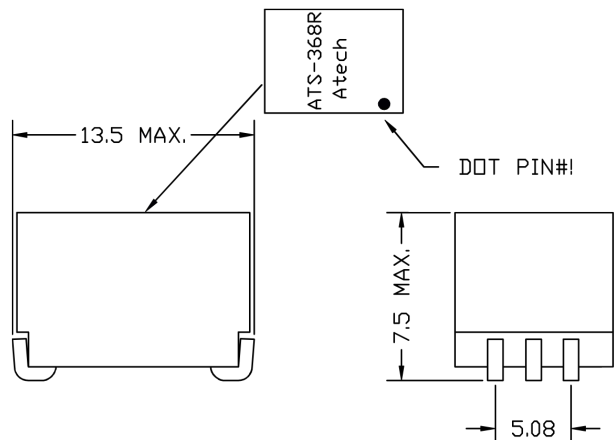

ELECTRICAL CHARACTERISTICS :

- DCR: 1-3 = 4.6 OHM MAX. 6-4 = 440 OHM MAX.
- INDUCTANCE ( @1KHZ, 0.1Vrms, PARALLEL )  
4-6 = 5H MIN.
- INSERTION LOSS ( @1KHZ, 250mVrms ) : 1.5dB MAX.
- FREQ. RESPONSE ( REF. 1KHZ )  
@200HZ = +/- 0.5dB @4KHZ = +/- 0.3dB.
- RETURN LOSS ( REF. 50 OHM )  
@200HZ = 15dB MIN. @4KHZ = 15dB MIN.
- TURN RATIO ( @15KHZ, 1Vrms ) 6-4 : 1-3 = 10+/-15%
- HI-POT ( @3750VAC, 1mA, 2SEC ) PRI-SEC.
- RoHS COMPLIANT



苏州沃虎电子科技有限公司

Tel:4001048018 Http://www.wohu-tek.com

Part Number	Impedance PRI:SEC	Type&Size	Mounting	Hi-Pot (Vrms)	Inductance	Turns Ratio (Line:Device)	Dimension L/W/H(mm)
ATS-368R	50:5K	EL-08	SMD(CASE)	3750	5.0H Min	1:10	13.5/10.0/7.5