





REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	MQ.Cui	2023.03.02

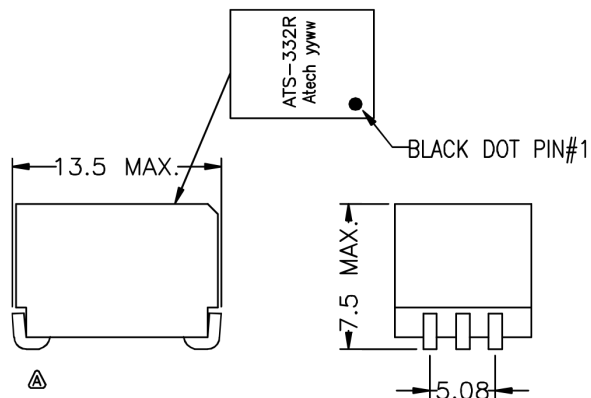

ELECTRICAL CHARACTERISTICS :

- DCR: 1-3 = 6-4 = $128\Omega \pm 10\%$
- INDUCTANCE (@1KHz, 0.1Vrms) 1-3 = 0.7H MIN.
- INSERTION LOSS (@1KHz, 0dBm) : 2.7dB TYP.
- FREQ. RESPONSE (REF. 1KHZ)
@200Hz = $\pm 1\text{dB}$ @4KHz = $\pm 1\text{dB}$.
- RETURN LOSS (REF. 600Ω)
@200Hz = 14dB MIN. @4KHz = 14dB MIN.
- TURN RATIO (@16KHz, 1Vrms) 1-3 : 6-4 = $1 \pm 1\%$
- THD(@600Hz, -10dBm) = -74dB TYP.
- HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
- RoHS COMPLIANT



苏州沃虎电子科技有限公司

Tel:4001048018 Http://www.wohu-tek.com

Part Number	Impedance PRI:SEC	Type&Size	Mounting	Hi-Pot (Vrms)	Inductance	Turns Ratio (Line:Device)	Dimension L/W/H(mm)
ATS-332R	600:332	EL-08	SMD(CASE)	3750	0.7H Min	1:1	13.5/10.0/7.5