


REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	MQ.QU	2017.11.14



TOP VIEW

MATERIAL:


HOUSING: LCP,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
G/FU" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:


DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:


VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.




LEFT SIDE VIEW




FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW




RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

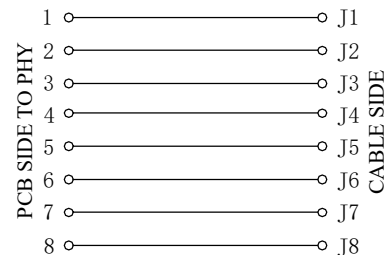

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V



WOHU 苏州沃虎电子科技有限公司
Su Zhou Wo Hu Electronic Tech.Co.,Ltd.

TITLE:
RJ45 沉板3.0 DIP带屏蔽带灯
PART NO.:
SYTCB301188DB1W6DB1075
REMARK:

SIZE
A4
UNITS
MM[INCH]
SACLE
1:1
REV
A0
SHEET
1/1

GENERAL TOLERANCES
UNLESS SPECIFIED
x±0.35
x°±3.0°
.x±0.30
.x°±2.0°
.xx±0.25
.xx°±1.5°
.xxx±0.10
.xxx°±1.0°

APPROVED BY:
JP.Gong
CHECKED BY:
TW.Xu
DESIGND BY:
MQ.Qu